




UTILITY CONSTRUCTION

	<h1 style="text-align: center;">Onslow Water & Sewer Authority</h1> <p style="text-align: center;">USE WITH "ONWASA MANUAL OF SPECIFICATIONS, STANDARDS AND DETAILS, latest revision"</p>		
	<h2 style="font-size: 2em;">CREEK/DITCH CROSSING</h2>		
SCALE: Not To Scale	SCALE: 1" = 10'		DETAIL # WS-CDC
REVISION DATE March, 2012			SHEET # 1 of 1

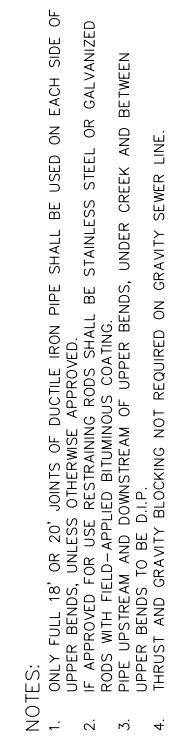

REVISION: 3) CHANGED 2" 90° BEND TO BRASS INSTEAD OF CI AND ADDED 6" DISTANCE REQUIREMENT FROM VALVE BOX LID TO TOP OF CAP - 03/14/2012
REVISION: 2) REMOVED CONCRETE LABEL AND ADDED "TYP." TO CONCRETE COLLAR LABEL - 03/14/2012

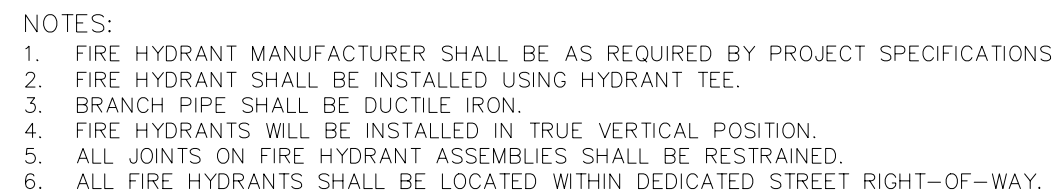

ANYTIME SITE WORK, CONSTRUCTION, ROAD WORK, OR ANY OTHER WORK CHANGES THE GRADE OF THE FIRE HYDRANT, THE CONTRACTOR IS RESPONSIBLE FOR ADJUSTING THE FIRE HYDRANT TO STAY WITHIN COMPLIANCE.

<div><div>02</div><div>1</div><div>1</div></div> <div><div>ONWASA</div><div>ONSLAW WATER AND SEWER AUTHORITY</div></div>	<div>Onslow Water & Sewer Authority</div> <div>USE WITH "ONWASA MANUAL OF SPECIFICATIONS, STANDARDS AND DETAILS, latest revision"</div>			
	<div><div>FIRE HYDRANT ASSEMBLY SHOULDER / DITCH SECTION</div><div><table><tr><td>SCALE: W/S To Scale</td><td>DETAIL #</td></tr><tr><td>REVISION DATE: March, 2012</td><td>SHEET # 1 of 1</td></tr></table></div></div>	SCALE: W/S To Scale	DETAIL #	REVISION DATE: March, 2012
SCALE: W/S To Scale	DETAIL #			
REVISION DATE: March, 2012	SHEET # 1 of 1			